

**TOWN OF KERMIT
MINGO COUNTY, WEST VIRGINIA**

CONTRACT NO. 1 – GENERATOR INSTALLATION PROJECT

APRIL 1, 2020

ADDENDUM NO. 1

To whom it may concern:

A. BOILER PLATE

1. Bids will be received by The Thrasher Group, Inc. located at 300 Association Drive, Charleston, WV 25311. Bids shall be mailed or hand delivered by April 9, 2020 at 2:00 p.m. Social distancing guidelines will be followed. Conference call information is as follows: Call-in Number: 304-848-6940; Conference Number: 1439089, and Go-To Meeting at the following address <https://global.gotomeeting.com/join/813817957>.

B. SPECIFICATIONS

1. NOT APPLICABLE

C. DRAWINGS

1. NOT APPLICABLE

D. QUESTIONS AND CLARIFICATIONS

1. QUESTION:

Could you please clarify the run time for the generator sets? The one-line drawing for the 250 KW indicates approximately 48 hour run time for the larger unit and the specifications call for a 24 hour run time.

RESPONSE:

Fuel tanks for both units shall be sized for a 24-hour run time.

2. **QUESTION:**

What is the type of material and thickness of the stair treads?

RESPONSE:

Stair tread thickness is 1" and material is 6063 aluminum.

3. **QUESTION:**

What is the run time @ 100% load on this project?

RESPONSE:

24 hours at 100% load capacity.

4. **QUESTION:**

I see where it calls on 750 gallons for the tank on E2. I have a factory 660 gallon tank that will give the unit a 100% load run time of 34hours. This units uses 19.4 gph at full load. The 750 gallon tank would provide a 38.6 hour run time. Would 34 hours be acceptable?

RESPONSE:

Fuel tanks for both units shall be sized for a 24-hour run time.

5. **QUESTION:**

Does the Automatic Transfer Switch need to be service rated for both generator sets?

RESPONSE:

No, the Automatic Transfer Switch's do not require a service entry rating.

6. **QUESTION:**

In drawing Detail 2, Section C-C, what is the fill material required in the center section where the generator sets?

RESPONSE:

Rubble fill is required in the center section of the concrete generator support platform.

E. GENERAL

1. B&O Taxes are required for this project, see attached rate schedule included with this Addendum No. 1.
2. Bidders are hereby notified to acknowledge receipt of all addenda in space provided on the Bid Form.
3. Prevailing wages do NOT apply to this project.

If you have any questions or need any other information, please do not hesitate to contact me.


Sincerely,

THE THRASHER GROUP, INC.



JESSE ALDEN, P.E.
Project Manager

Enclosures

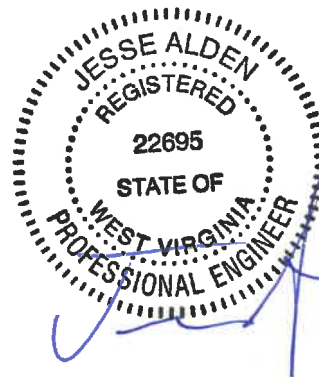

4-1-2020

TOWN OF KERMIT BUSINESS AND OCCUPATION TAX

QUARTERLY RETURN

Class Code	Business Classifications	Tax Per \$100
110	Limestone or sandstone quarried or mined and timber	1.50
111	Sand, gravel or other mineral product not quarried or mined	3.00
112	Other natural resource products	.50
113	Gross sales value manufactured products	.30
114	Gross income of retailers, restaurants and others	.25
115	Gross income of wholesalers	.15
116	Electric light & power co. (sales & demand charges domestic purposes and commercial lighting)	4.00
117	Electric light & power co. (all other sales and demand charges); Gas companies	3.00
118	All other public utilities (except telegraph & telephone companies, railways & other transportation companies)	2.00

Class Code	Business Classifications	Tax Per \$100
119	Water and sewage companies	4.00
120	Contracting business-gross income	2.00
121	Industrial and small loan companies	1.00
122	Amusement business-gross income (a) Theatres, sporting events, etc.	.50
123	(b) Clubs, associations, etc.	.50
124	(c) All others	.50
125	Services & All other business-gross income	.25
126	Rents, royalties, etc.	.25

MAKE CHECK PAYABLE AND REMIT DIRECTLY TO

TOWN OF KERMIT
 BOX 385
 KERMIT, WV 25674

