


**VILLAGE OF BREWSTER
STARK COUNTY, OHIO**

PARK DRIVE PHASE 1

ADDENDUM #1

JANUARY 12, 2023

THRASHER PROJECT #101-080-10022

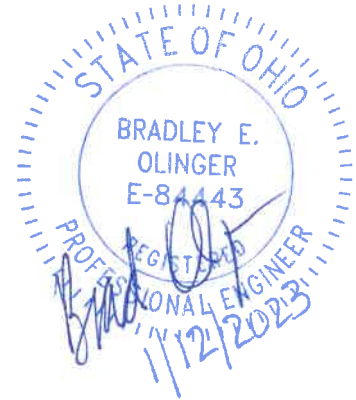

TO WHOM IT MAY CONCERN:

The following are clarifications and responses to questions posed by contractors for the above-referenced project.

A. GENERAL

1. **YOU MUST ACKNOWLEDGE RECEIPT OF THIS ADDENDUM WHEN PREPARING YOUR BID PACKAGE FOR THIS PROJECT.**

B. QUESTIONS AND RESPONSES

QUESTION

1. *Alternate # 1 calls for 574 SY ODOT Item 452 – 6” Non-Reinforced Concrete. Can you tell us what area of the proposed work that is for?*

RESPONSE

Alternate Bid #1 is a price for the option of going with a concrete buildup for the shared use path in place of the asphalt buildup called for in the base bid.

QUESTION

2. *Page 3 shows sawcut line marked “various width”. What width were the 6” aggregate base and the 4” asphalt base quantified from on the bid form?*

RESPONSE

Where the proposed edge of pavement is outside the existing edge of pavement, the sawcut line is assumed to be 2’ from the existing edge of pavement. Where the proposed edge of pavement is inside the existing edge of pavement, the sawcut line is assumed to be 2’ from the proposed edge of pavement.

QUESTION

3. What is the depth of the underdrains?

RESPONSE

Base pipe underdrains are specified in the plans. Per Section 605.03.A of the ODOT CMS, “Excavate trenches measured vertically from the subgrade to the bottom of the trench at a depth of 18 inches (450 mm) for base pipe underdrains...”

QUESTION

4. *What will be used for bedding material on this project, limestone or gravel and what size?*

RESPONSE

Please refer to Section 611.02.H of the ODOT CMS for bedding and backfill specifications.

QUESTION

5. *Do you have a trench detail you could provide?*

RESPONSE

Please refer to Section 611.02.H of the ODOT CMS for bedding and backfill specifications.

QUESTION

6. Is there specs or details other than bicycle safe grates?


RESPONSE

Please refer to ODOT Standard Construction Drawings CB-2-2B, CB-2-4, and CB-3A for grate specifications.

As a reminder, bids will be received until 2:30 p.m. on Tuesday, January 17, 2023, at the office of the Village Administrator, Brewster Village Hall, 302 Wabash Ave South, Brewster, Ohio 44613. Good luck to everyone and thank you for your interest in the project.

Sincerely,

THE THRASHER GROUP, INC.



Project Manager