



COMPLEX PROJECTS  
REQUIRE RESOLVE  
THRASHER'S GOT IT


VILLAGE OF SCIO  
HARRISON COUNTY, OHIO

HILLTOP ST. AND MAIN ST. SANITARY SEWER EXTENSION

ADDENDUM #2

JULY 9, 2025

THRASHER PROJECT #T20-11019

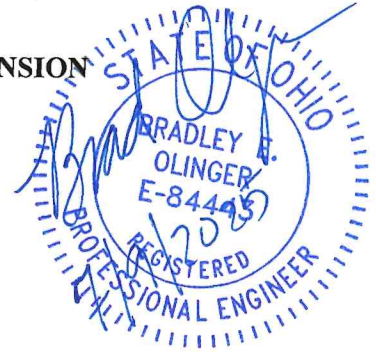

TO WHOM IT MAY CONCERN:

The following are clarifications and responses to questions posed by contractors for the above-referenced project.

A. QUESTIONS AND RESPONSES

1. **QUESTION**

In the areas where brick sidewalks are removed, will those be replaced with poured in place concrete?

**RESPONSE**

See Note 4., Sheet No.1 of the plans. "Contractor is to ensure no construction will damage the historic sidewalk in front of the Scio Museum". A field adjustment may be necessary to accomplish this.

2. **QUESTION**

Please clarify: the plans and profiles show PVC pipe, but the lateral detail shows HDPE fuse pipe for the main, lateral pipe, and clean out.

**RESPONSE**

All sewer materials on the sanitary sewer lateral detail on Sheet No. D2 should be PVC.

3. **QUESTION**


Are the watertight manholes to have a 24" clear opening?

**RESPONSE**

A 24" frame and cover clear opening is acceptable.

As a reminder, bids will be received until 1:00 p.m. on Wednesday, July 16, 2025, at the Village of Scio located at 210 E Main St, Scio, OH 43988. Good luck to everyone and thank you for your interest in the project.

Sincerely,  
THE THRASHER GROUP, INC.

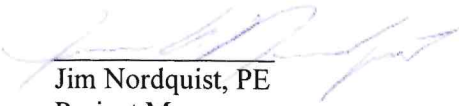  
Jim Nordquist, PE  
Project Manager